


Push trolley | MLK-B | Wide | 500 - 5.000 kg

- The distance between the wheels is easy to adjust and can be used on many kinds of I-beams
- It can be driven in a small turning diameter
- The hinge links the left and right side plate to guarantee equal force
- It travels along the lower edge of the I-beam
- The wheels are ball-bearing for smooth operation
- Compact design, smaller body and lightweight for low headroom applications
- The trolley has an eye as attachment point
- The trolley can be used on extra wide beams

Type	MLK-B
Brand	Mitari
Temperature range	-10 °C to + 40 °C
Norm hoist	NEN-EN 12100-1/2
HS code	8716800000

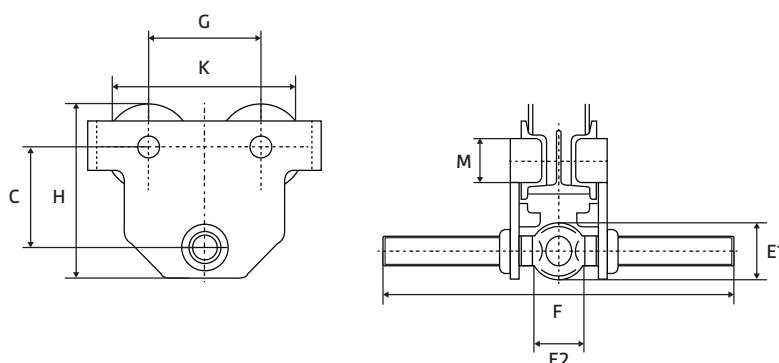

	Beam	Wheel												Weight
WLL kg	Width mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm		kg
500	160 - 305	200	178	150	80	82	99	30	27	27	377	30		8.7
1.000	160 - 305	254	215	189	95	106	119	44	29	30	395	35		11
2.000	160 - 305	275	240	215	108	125	132	55	35	36	405	47		118.5
3.000	160 - 305	327	284	255	130	140	153	69	43	42	420	56		32
5.000	160 - 305	365	310	275	141	165	168	73	49	48	437	63		44