




## J Hooks | with latches | 50 - 5.000 kg

- Easy to handle, stable and wear-resistant.
- J hooks with latches are forged in tempered steel class 8.
- They offer a safety factor of 4.
- The safety latch prevents loads or slings accidentally falling.
- These hooks have a WLL of 0.05 to 2 tons
- Ideal for the paint or industrial assembly sectors. The hook with latch is ideal for routing parts in painting or shot-blasting booths or simply for storing various lifting accessories such as chain slings, wire rope slings and other parts.
- Legible individual marking is also included to enable WLL traceability.

|               |                           |
|---------------|---------------------------|
| Type          | JHOOK1257                 |
| Brand         | Mitari                    |
| Safety factor | 4:1                       |
| Material      | Grade 80                  |
| Finish        | Painted red               |
| Norm          | NEN-EN 1677-1, 2, 3, en 5 |
| HS Code       | 7326909000                |

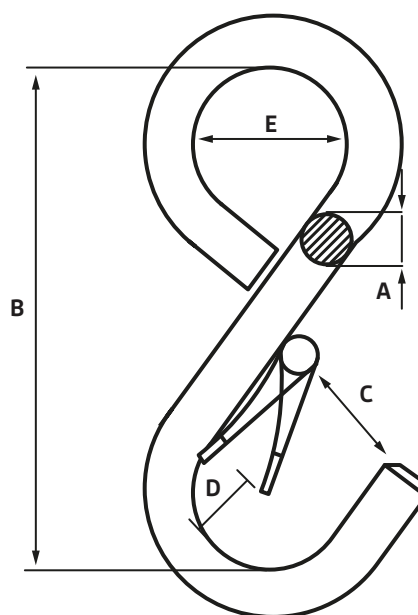

| Type  | WLL kg | A mm | B mm | C mm | D mm | E mm | Mass kg |
|-------|--------|------|------|------|------|------|---------|
| 1257A | 50     | 6    | 80   | 20   | 15   | 28   | 0.05    |
| 1257B | 100    | 8    | 80   | 20   | 15   | 28   | 0.08    |
| 1257C | 200    | 10   | 80   | 17   | 20   | 28   | 0.1     |
| 1257D | 300    | 14   | 100  | 23   | 20   | 35   | 0.26    |
| 1257E | 500    | 16   | 130  | 32   | 22   | 45   | 0.42    |
| 1257F | 750    | 18   | 160  | 42   | 27   | 56   | 0.7     |
| 1257G | 1.000  | 20   | 180  | 48   | 37   | 63   | 1       |
| 1257H | 1.250  | 22   | 200  | 51   | 38   | 70   | 1.25    |
| 1257J | 1.500  | 26   | 220  | 55   | 50   | 77   | 2       |
| 1257K | 2.000  | 32   | 260  | 70   | 56   | 91   | 3.65    |
| 1257L | 3.000  | 36   | 320  | 84   | 65   | 112  | 5.7     |
| 1257M | 4.000  | 40   | 360  | 103  | 76   | 126  | 8.5     |
| 1257N | 5.000  | 45   | 400  | 110  | 84   | 140  | 12      |