


Electric winch | MDL | 230 - 300 - 500 kg

- The winch can be attached to a scaffold.
- Plug and play
- Light and compact design
- Automatically switches off when the cable is completely wound up
- Equipped with an emergency stop
- The electrical part must be shielded when used in humid environments.

Type	MDL
Brand	Mitari
Hooks	Swivel bottom hook
FEM class	1Am
IP	IP22
Voltage	230V/Hz
Length power cord	4,50 meter
Temperature range	-10 °C to +40 °C
Finish	Powder coating
Norm hoist	NEN-EN 12100-1/2
HS Code	8425310000

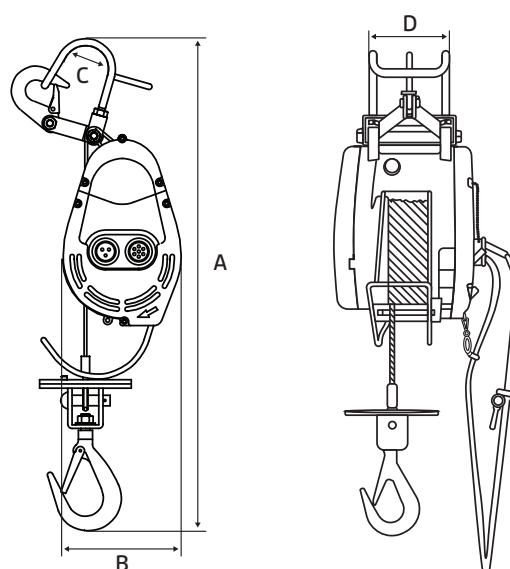

WLL kg	Motor	Speed p/min	Wire rope Ø	ED %	Lifting height	Amm	B mm	C mm	D mm	Weight kg
230	1.3 kW	19	5	20	30 m	660	180	65	145	30
300	1.3 kW	12	5	20	60 m	670	210	65	145	30
500	1.8 kW	11	7	20	30 m	670	210	65	145	35